
PUFFER AOP 100% Recycled Polyester



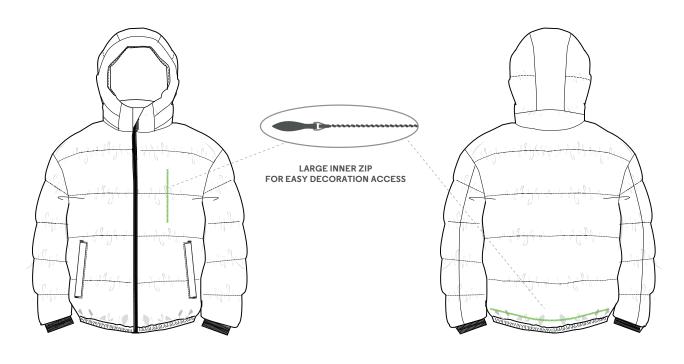

SCREEN PRINT	V	NEED SPECIAL INKS AND ADDITIVES FOR LOW CURING TEMPERATURE
TRANSFER DTF, FLOCK, SCREEN	V	MAX 130°C / 2-3 BARS / BAKING PAPER ANTI-MIGRATION LAYER RECOMMENDED USE TYPE OF GLUE ADEQUATE FOR PRESS T° STEAM AFTER PRESS TO LIMIT SHINY MARKS
D.T.G.	×	INSTEAD USE TRANSFER (FOLLOW TRANSFER RECOMMENDATIONS)
EMBROIDERY	V	DIRECT EMBROIDERY, STITCHED PATCH, LOOP LABELS

STANLEY/STELLA